




## MIFARE® DESFire 4K Transponder Datenblatt

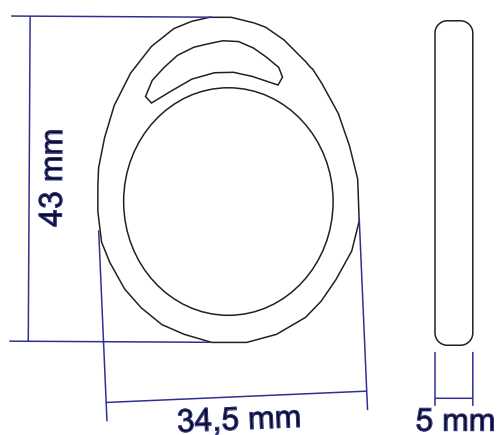

schwarz RAL9011  
860-0134



blau RAL5017  
860-0262



rot RAL3000  
860-0263



grün RAL6024  
860-0264




gelb RAL1016  
860-0265



weiß RAL9016  
860-0266



orange RAL2008  
860-0267



türkis RAL5018  
860-0268



grau RAL7035  
860-0269



braun RAL8028  
860-0270

### FS-Fertigungsservice

Waldweg 11

85777 Fahrenzhausen

Tel. 08133-9158

eMail: [Info@FSJR.de](mailto:Info@FSJR.de)

Internet: [www.easyident.de](http://www.easyident.de)

Shop: [www.easyident-shop.de](http://www.easyident-shop.de)

### Technische Daten:

Transponder Type: MIFARE DESFire 4K EV2

Frequenz: 13,56 MHz

Kunststoffkörper: Polycarbonat farbig

Temperatur: -20 bis +70 Grad

Gewicht: 4,5 Gramm

Wasserdicht IP-64

Stand: 8.11.2019